


ANSCHLUSSPLAN

Lastrelais CLR3



Relaisausgang – siehe Herstellerangabe
 Die Anschlussleitungen sind in den vorhandenen
 Zugentlastungen festzusetzen.

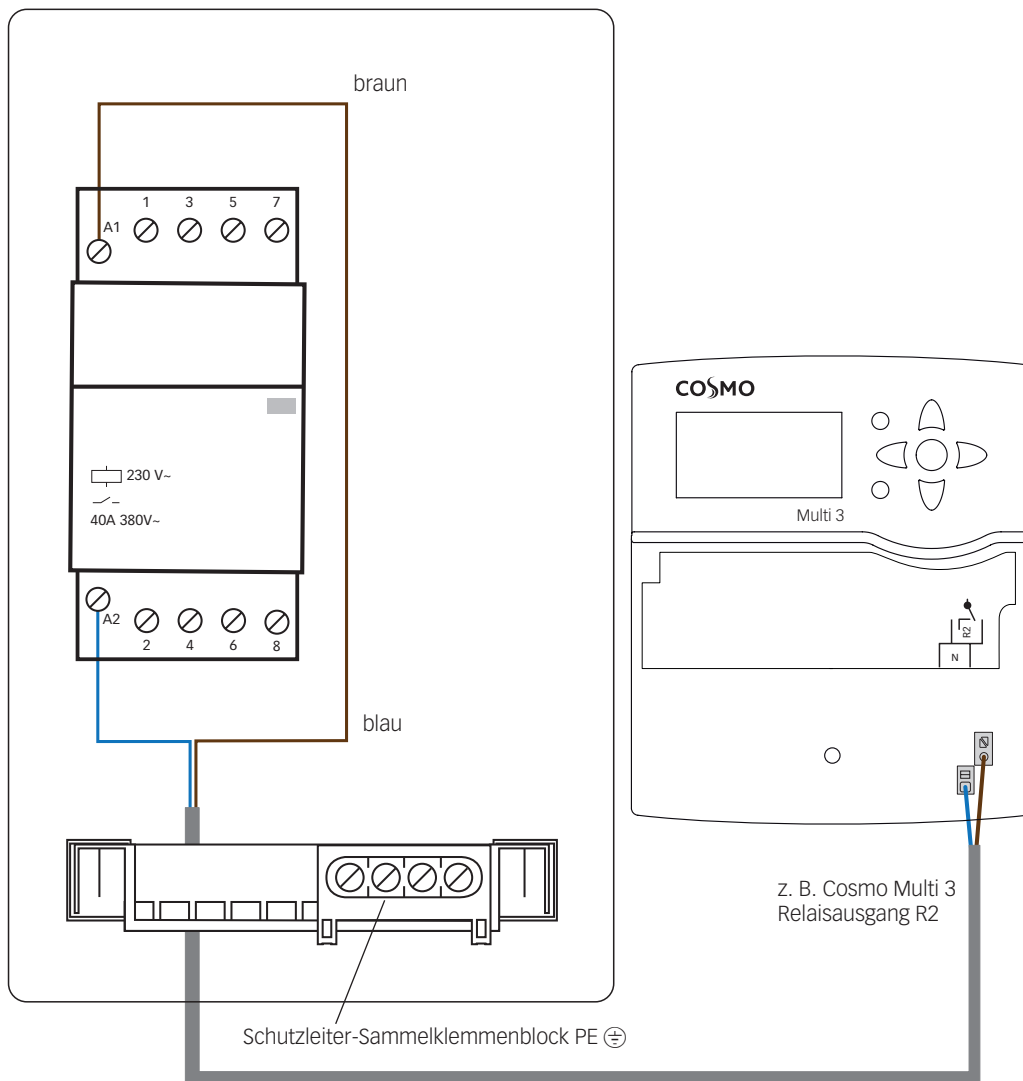

HINWEIS:

Pumpen müssen über das Lastrelais angesteuert werden:

- Leitungsdimensionierung gemäß örtlicher Situation. Die Verantwortung liegt beim Fachhandwerker
- Lesen Sie diese Anleitung vor der Montage des Zubehörs sorgfältig durch!

WARNUNG!



ELEKTRISCHER SCHLAG!

Bei geöffnetem Gehäuse liegen stromführende Bauteile frei!

- Vor jedem Öffnen des Gehäuses das Gerät allpolig von der Netzspannung trennen!

TECHNISCHE DATEN

Spule Bemessungsstrom bei 230 V AC 12,5 mA

Bemessungsleistung der Spule 3 VA/ 50 Hz

Schutzart: IP30

Schutzklasse: I

Zulässige Leitungsquerschnitte:

Spulenanschlüsse eindrätig 2x1,5/ 1x2,5mm²

Spulenanschlüsse mehrdrätig 2x1,5...2,5mm²


Kontaktanschlüsse eindrätig 1x6...25mm²

Kontaktanschlüsse mehrdrätig 1x6 ... 16mm²



CONNECTION DIAGRAM

Power relay CLR3

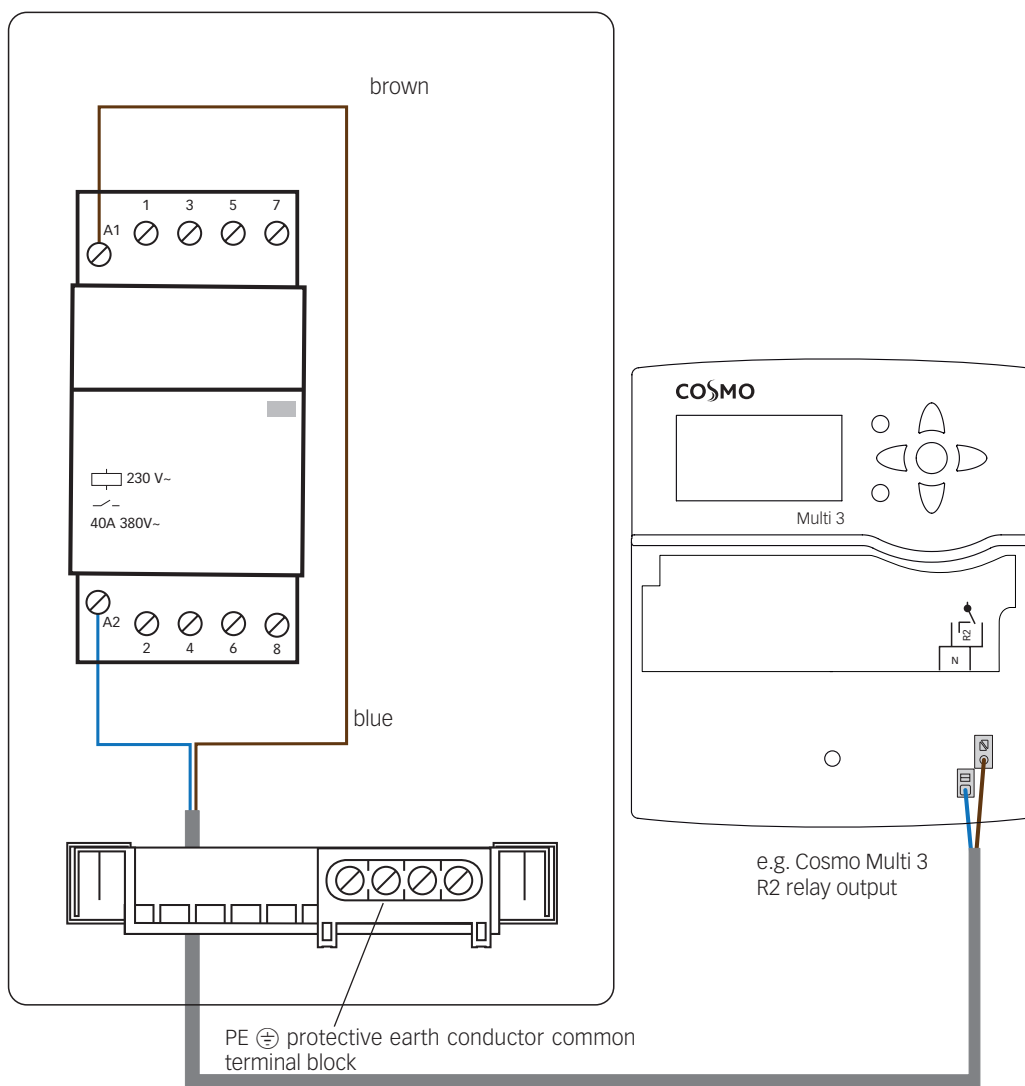

NOTE:

Pumps have to be controlled via the power relay:

- Cable dimensioning according to the local situation. Responsibility rests with the specialised craftsperson
- Read this manual carefully before mounting the accessory!

WARNING! !



ELECTRIC SHOCK!

Upon opening the housing, live parts are exposed!

- Always disconnect the device from power supply before opening the housing!

Relay output - see manufacturer's specifications
Connection cables must be fastened in the existing strain reliefs.

Technical data

Rated coil current at 230 V AC 12.5 mA

Rated coil power 3 VA/ 50 Hz

Ingress protection: IP30

Protection class: I

Cable cross-sections permitted:

Single-wire coil connections 2x1,5/1x2,5mm²

Multi-wire coil connections 2x1,5...2,5mm²

Single-wire contact connections 1x6...25mm²

Multi-wire contact connections 1x6 ... 16mm²