





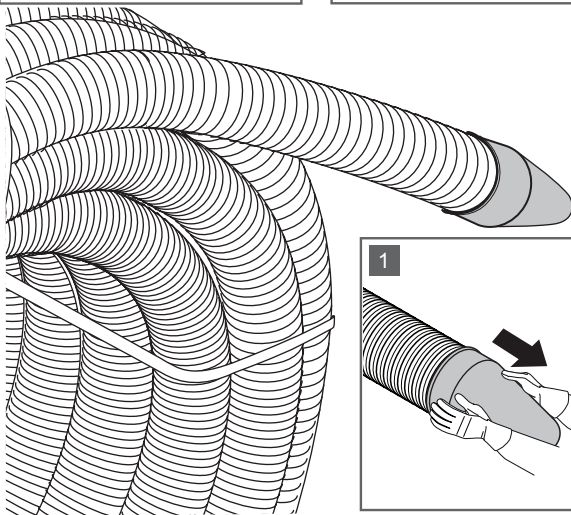









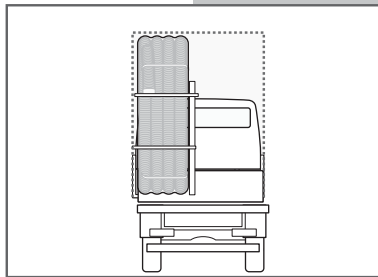


Pipe handling













< 50 m
d = 140/175 mm



> 50 m d = 140/175 mm
≥ 50 m d = 200/250 mm



1
2
3

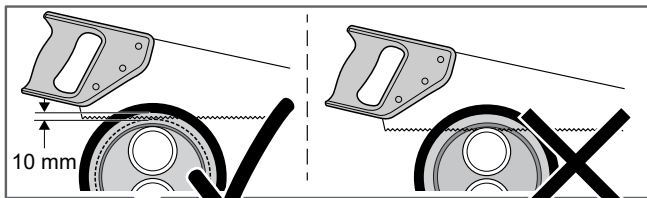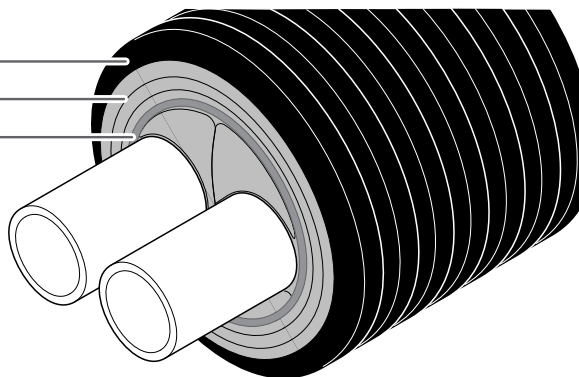

 $n \times d \times s/d_o$ (d, s, d _o in [mm])	 r min. r min. in [m]
2x32x2,9 - 2x32x3,5/140	0,5
2x40x3,7 - 2x32x3,5/175	0,8

COSMO GMBH

Brandstücken 31, 22549 Hamburg

info@cosmo-info.de
www.cosmo-info.de

COSMO reserves the right to make changes, without prior notification, to the specification of incorporated components in line with its policy of continuous improvement and development.

1142343 v2_05_2025