
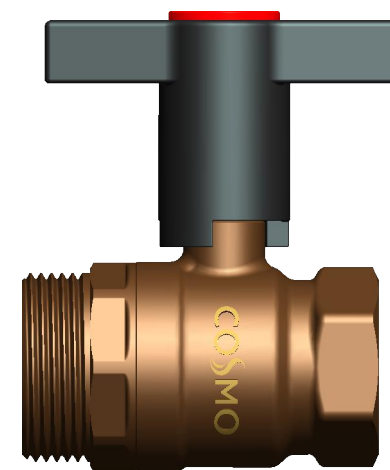
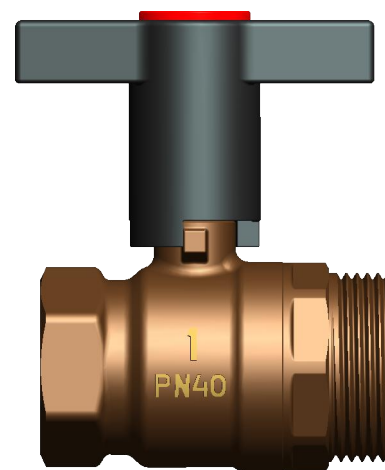


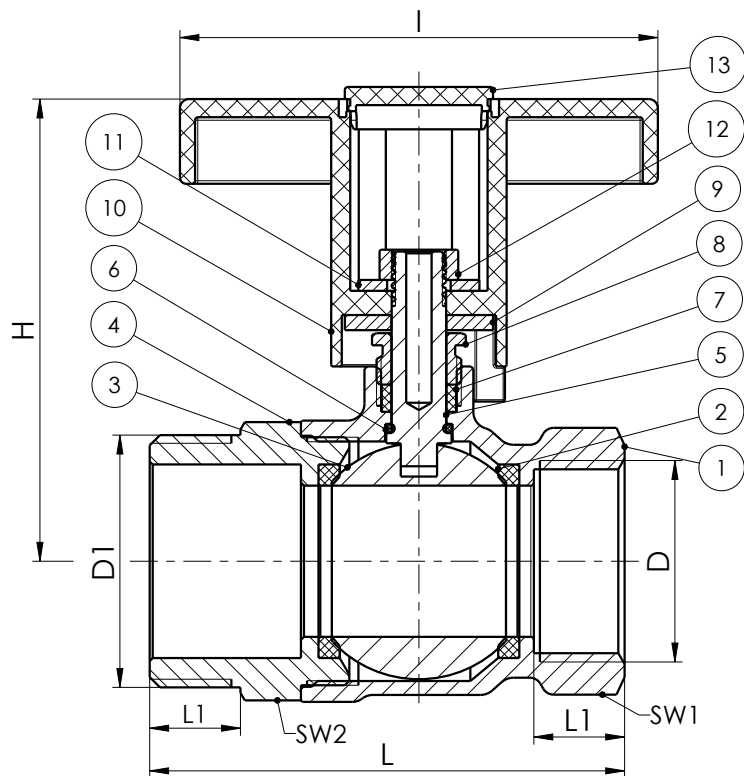

S118520TS706-5000	Rp11/4	G11/2	32	40	89.5	15.5	79.5	78	50	51
S118520TS705-5000	Rp1	G11/4	25	40	78.5	15	79	76	39	43.5
S118520TS704-5000	Rp3/4	G1	20	40	69	13.7	59.5	72	32	35
S118520TS703-5000	Rp1/2	G3/4	15	40	64.5	14	59.5	69	27	28.5
CODE	D	D1	DN	PN	L	L1	I	H	SW1	SW2

13	S118520TS-013	Red Cap	1	POM	
12	S118520TS-012	Nut	1	Steel	
11	S118520TS-011	Washer-1	1	Steel	
10	S118520TS-010	T-LEVER	1	POM	
9	S118520TS-009	Torque Plate	1	Steel	
8	S118520TS-008	Gland	1	Brass	
7	S118520TS-007	Gland Packing	1	PTFE	
6	S118520TS-006	O-ring	1	EPDM	
5	S118520TS-005	Stem	1	Brass	
4	S118520TS-004	Body Cap	1	Bronze	C83600
3	S118520TS-003	Ball	1	Stainless steel	SS304
2	S118520TS-002	Seats	2	PTFE	
1	S118520TS-001	Body	1	Bronze	C83600
NO.	PART CODE	PART NAME	Q'TY	MATERIALS	Specification

NOTE:

- 1.Body in casting bronze;
- 2.Temperature Limits:-10° C,+120° C;
- 3.Threads:DIN ISO 228/1,ISO 7/1;

This drawing must not be communicated to third parties,not copied,nor abused in any other way.	TOLERANCES UNLESS OTHERWISE SPECIFIED					Surface		Scale 1:1	
			Dimensions: ± mm	Angle: ±					
	PRODUCT OR ASSEMBLED PART HAS TO MEET REQUIREMENTS OF STANDARD(S)					weight	Material		
Modification						Drawing Name.		Unit mm	
					Drawing: MY	02/09/2024	Gunmetal Ball Valve		
					Approved: ZHANG	02/09/2024			
					Code No.			Revision	Format
					S118520TS7(03~06)-5000			A/0	A/4
NO.	Changes	Name	Date						