









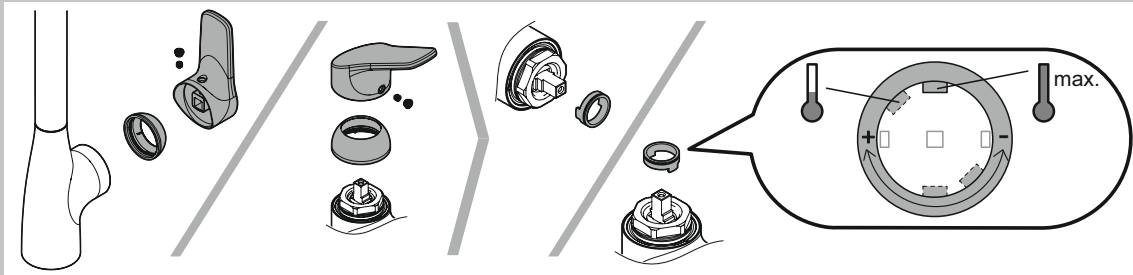



- ČZ Návod k instalaci a k použití
- E Instrucciones de montaje y de manejo
- F Instructions de montage et mode d'emploi
- GB Installation and operating instructions
- H Szerelési és használati utasítás
- I Istruzioni di montaggio e per l'uso
- NL Montagehandleiding en Gebruiksaanwijzing
- NO Monterings- og bruksanvisning
- PL Instrukcja montażu i obsługi
- RU Руководство по монтажу и эксплуатации
- SK Návod na montáž a obsluhu



DIN EN 806
DIN EN 1717
DIN 1988
Global
Standards

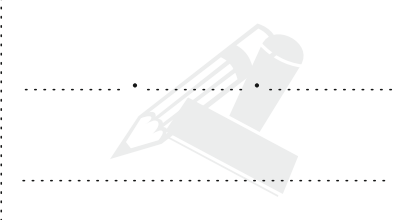

°C / °F

max. 70 °C / 158 °F

✓ 60 °C / 140 °F

✓ 3 bar / 43,5 psi

min. 1 bar / 14,5 psi

max. 10 bar / 145 psi

3 min.

max. 70 °C / 158 °F

≥ 2 x D

D

>15 mm

>15 mm

>20 mm

1.

1

2

Ø35 mm

2.

3

4

5

≤ 2 mm

9 30 01600-43 VIGOUR

3a.

6

3b.

6

8

7

4.

1

3

2

4

5