
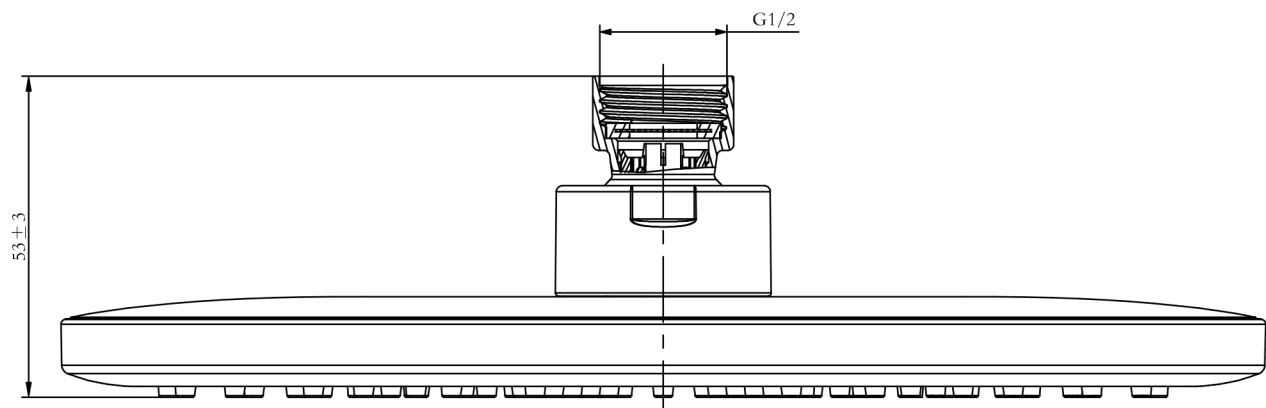


D

C

B


A

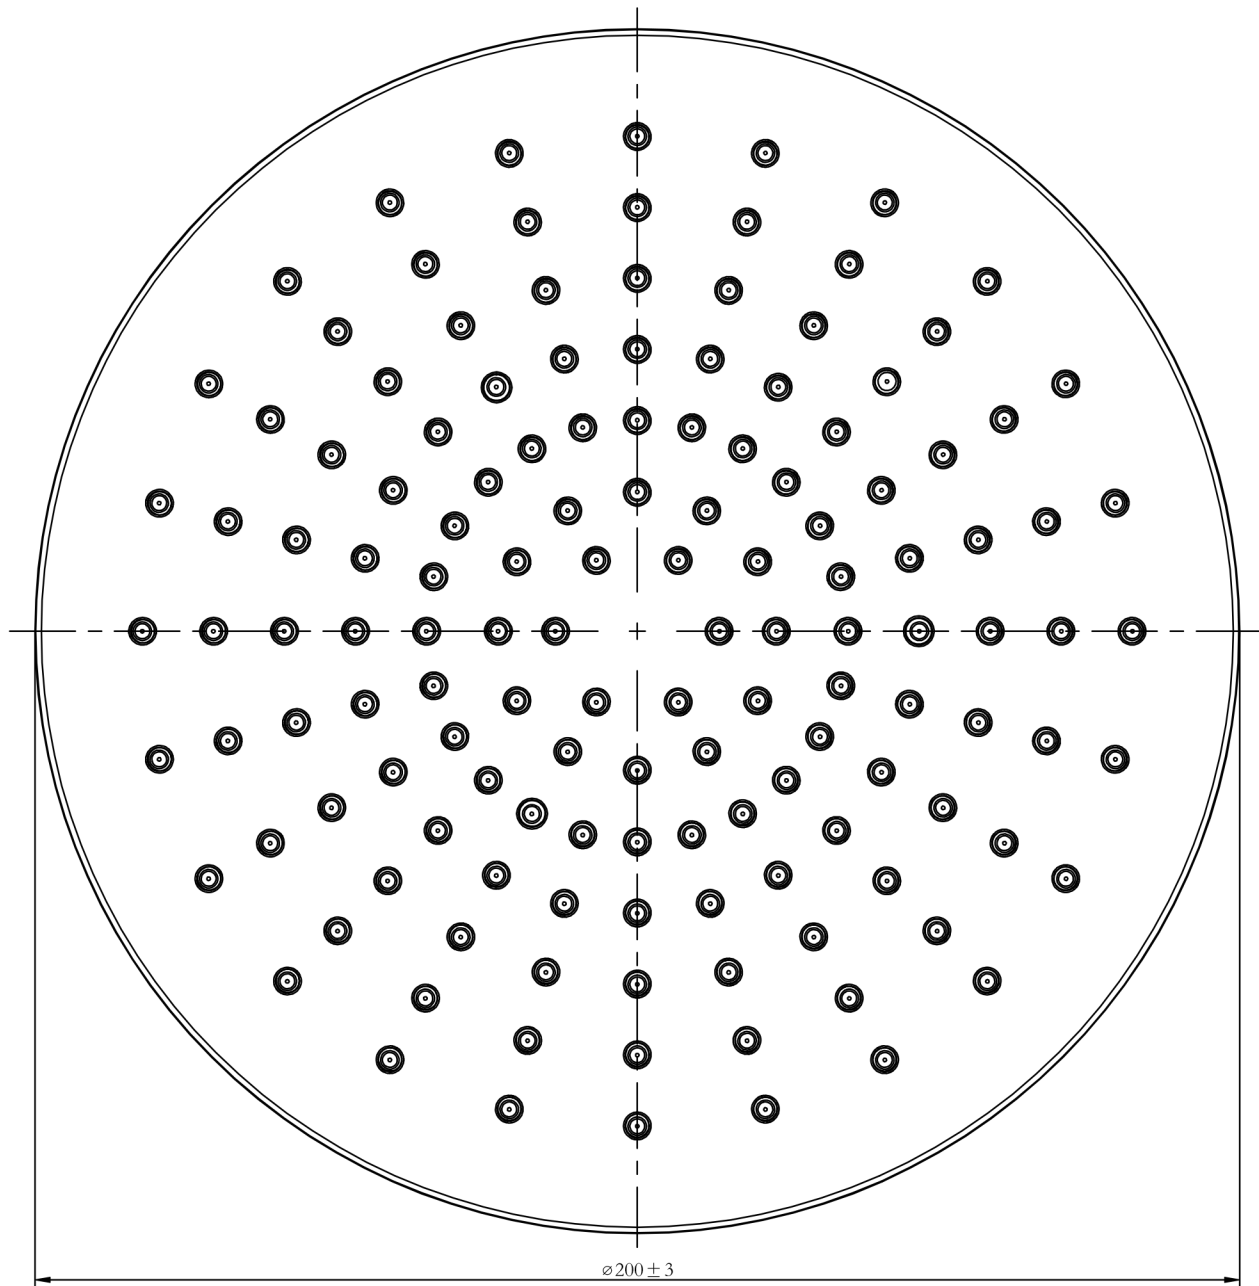

SECTION A-A

- TECHNICAL REQUIREMENTS:
APPEARNCE:
1. MEET EN1112 AND EN248.
 2. G1/2 THREAD MEETS GAUGE.
 3. FLOW RATE: WITH 9.6L FLOW REGULATION, UNDER 0.3MPa PRESSURE, THE FLOW RATE NEEDS TO BE LESS THAN 10L.
 4. MEET THE KTW, ACS, WRAS CERTIFICATION.

					DWG.BY		V12KB20R	
					CKD.BY			
					APP.BY		DWG.NO.	111023870001
					DATE		MATERIAL	ABS757
			VIEW	UNIT	REV	VIGOUR		
SIGN	DESCRIPTION	ZO.		mm	1			

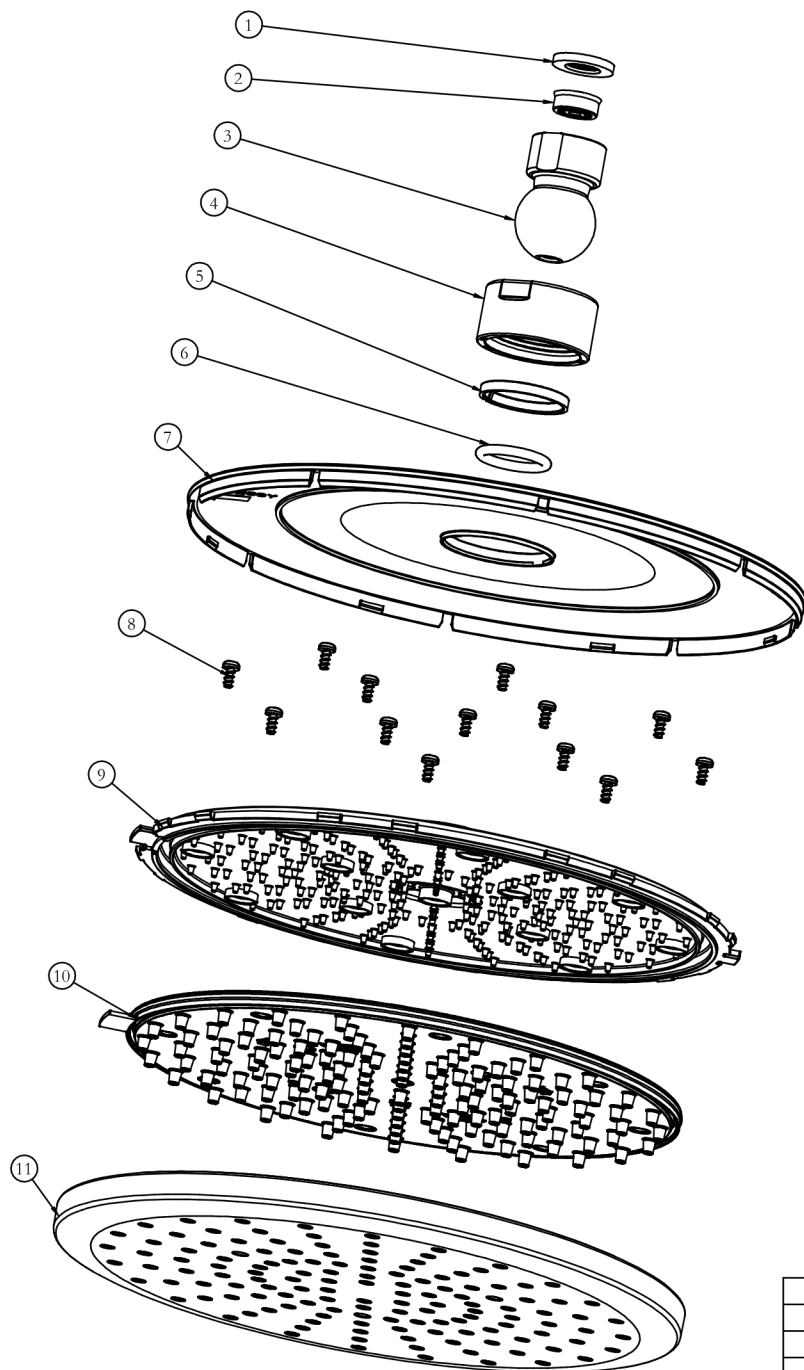

11	111023871001	FACEPLATE	ABS757	1
10	111023871003	NOZZLE	LSR	1
9	111023871002	INNER BODY	POM_WK2001	1
8	C3X6X01ST	SCREW	SUS304	13
7	111023871000	HOUSING	ABS757	1
6	R18X3X04	ORING	EPDM 70°	1
5	999910101236	C-RING	POM/M90	1
4	111020321005	JOINT NUT	ABS747	1
3	999910102628	BALL JOINT	Cu CW617N	1
2	S15_06X2_5X01	FLOW RATE RESTRICTOR	POM	1
1	D19_2X11_2X14	WASHER	EPDM+SUS304	1
NO.	DWG.NO.	NAME	MATERIAL	QTY

					DWG BY		V12KB20R	
					CHKD BY			
					APP BY			
					DATE		MATERIAL	111023870001 ABS757
SIGN	DESCRIPTION	ZO.		UNIT mm	REV 1	VIGOUR		